

Temperature Detection Face Recognition Terminal ADR08



BODY TEMPERATURE
DETECTION



BIO-ASSAY DETECTION




ABNORMAL ALARM



Refuse Fake
Clock in by
Photo



Refuse Fake
Clock in by
Video

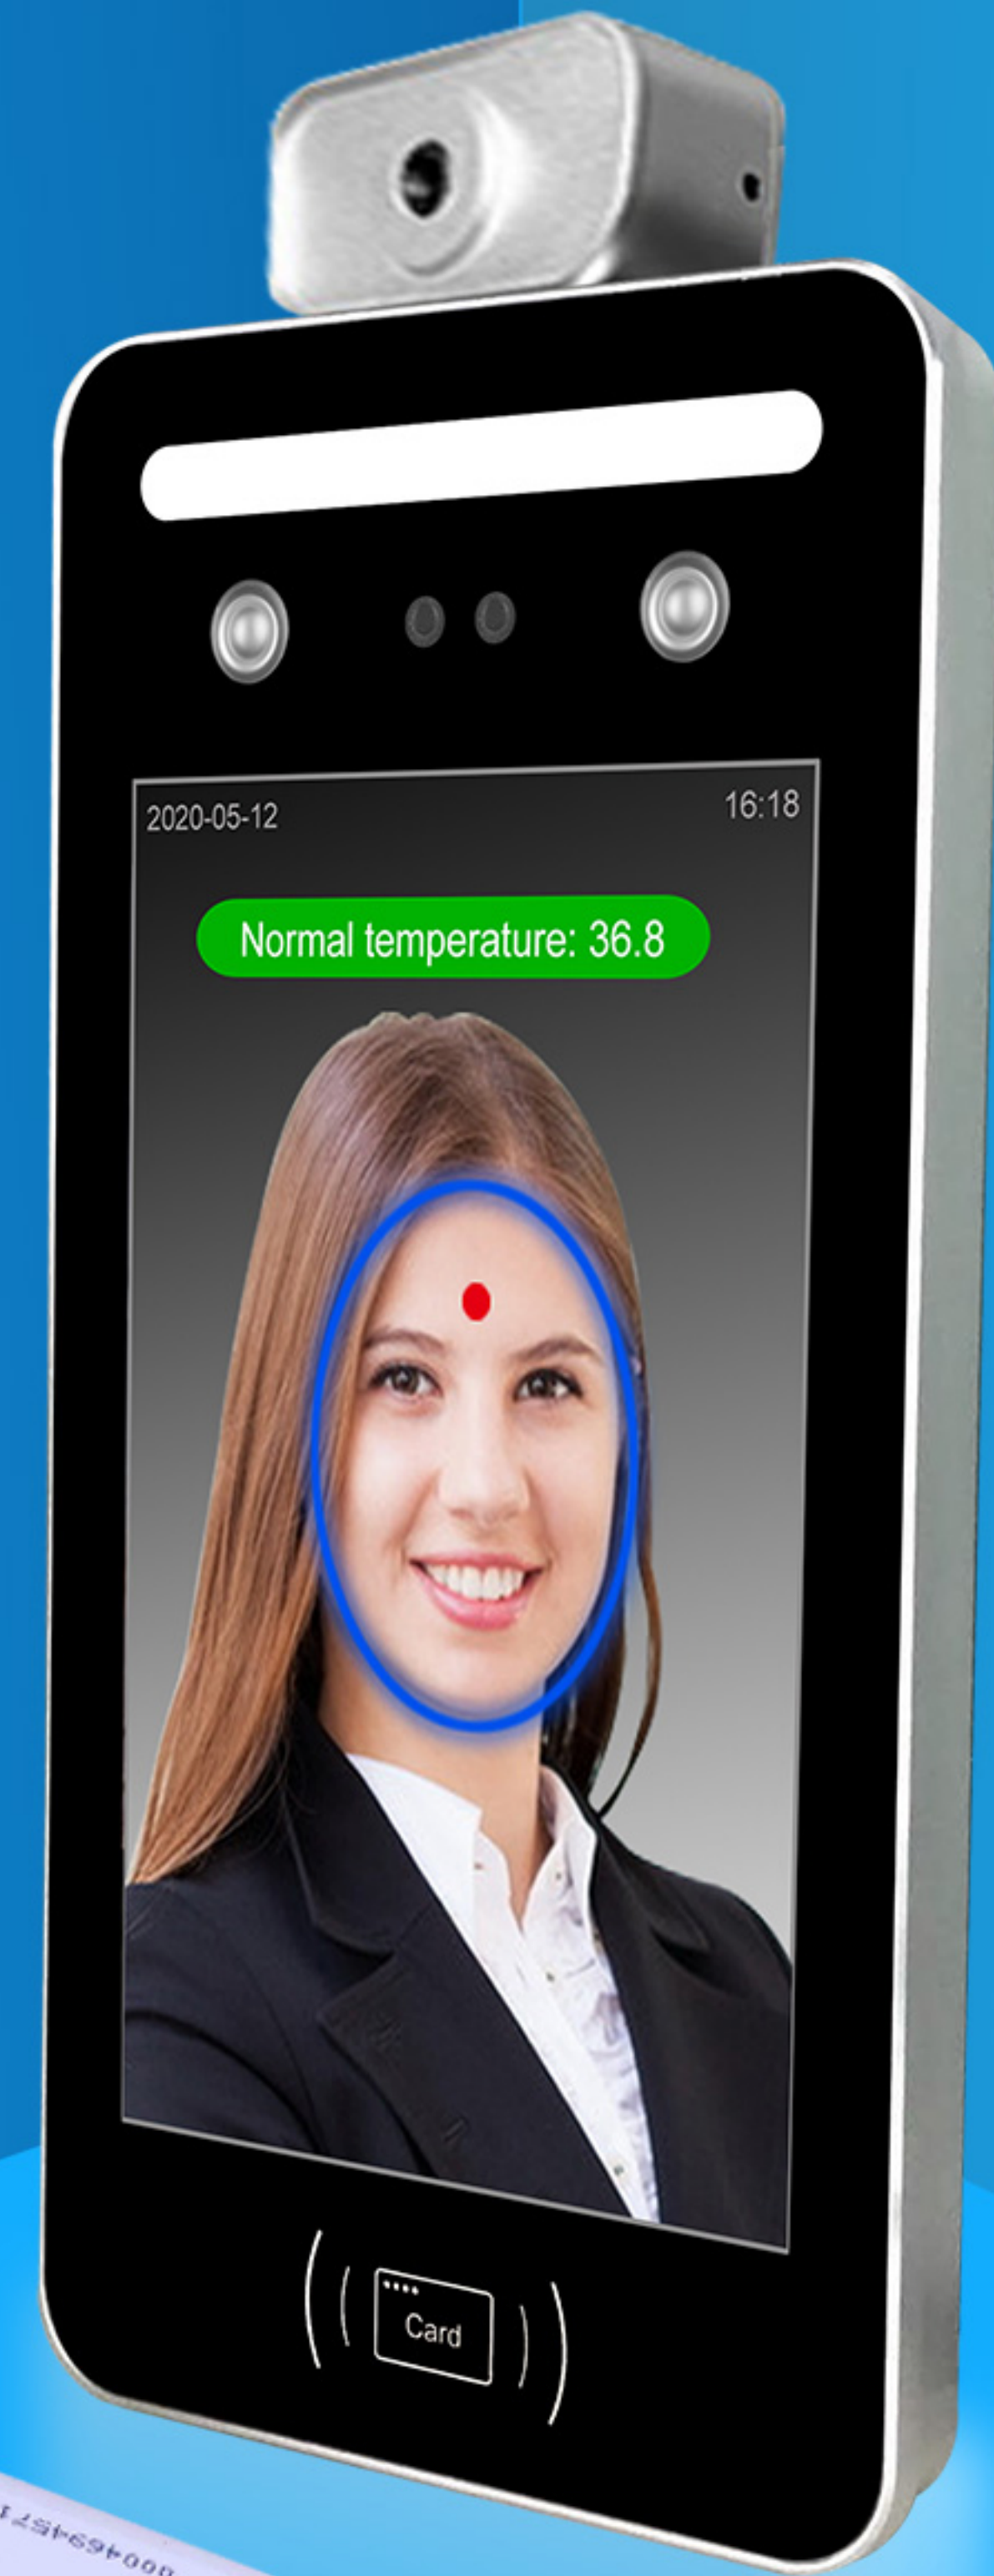

ID / IC



Automatic
Detection



Smart
Voice



Identity
Verification



Crowd
Monitoring



Data
Management

8.0" LCD touch screen

2 Million pixel wide angle dynamic camera

Face recognition speed is less than 0.2s


8.0"
Touch screen

10000
Face Recognition

200W
Pixel


Access Control

ID / IC
10, 000

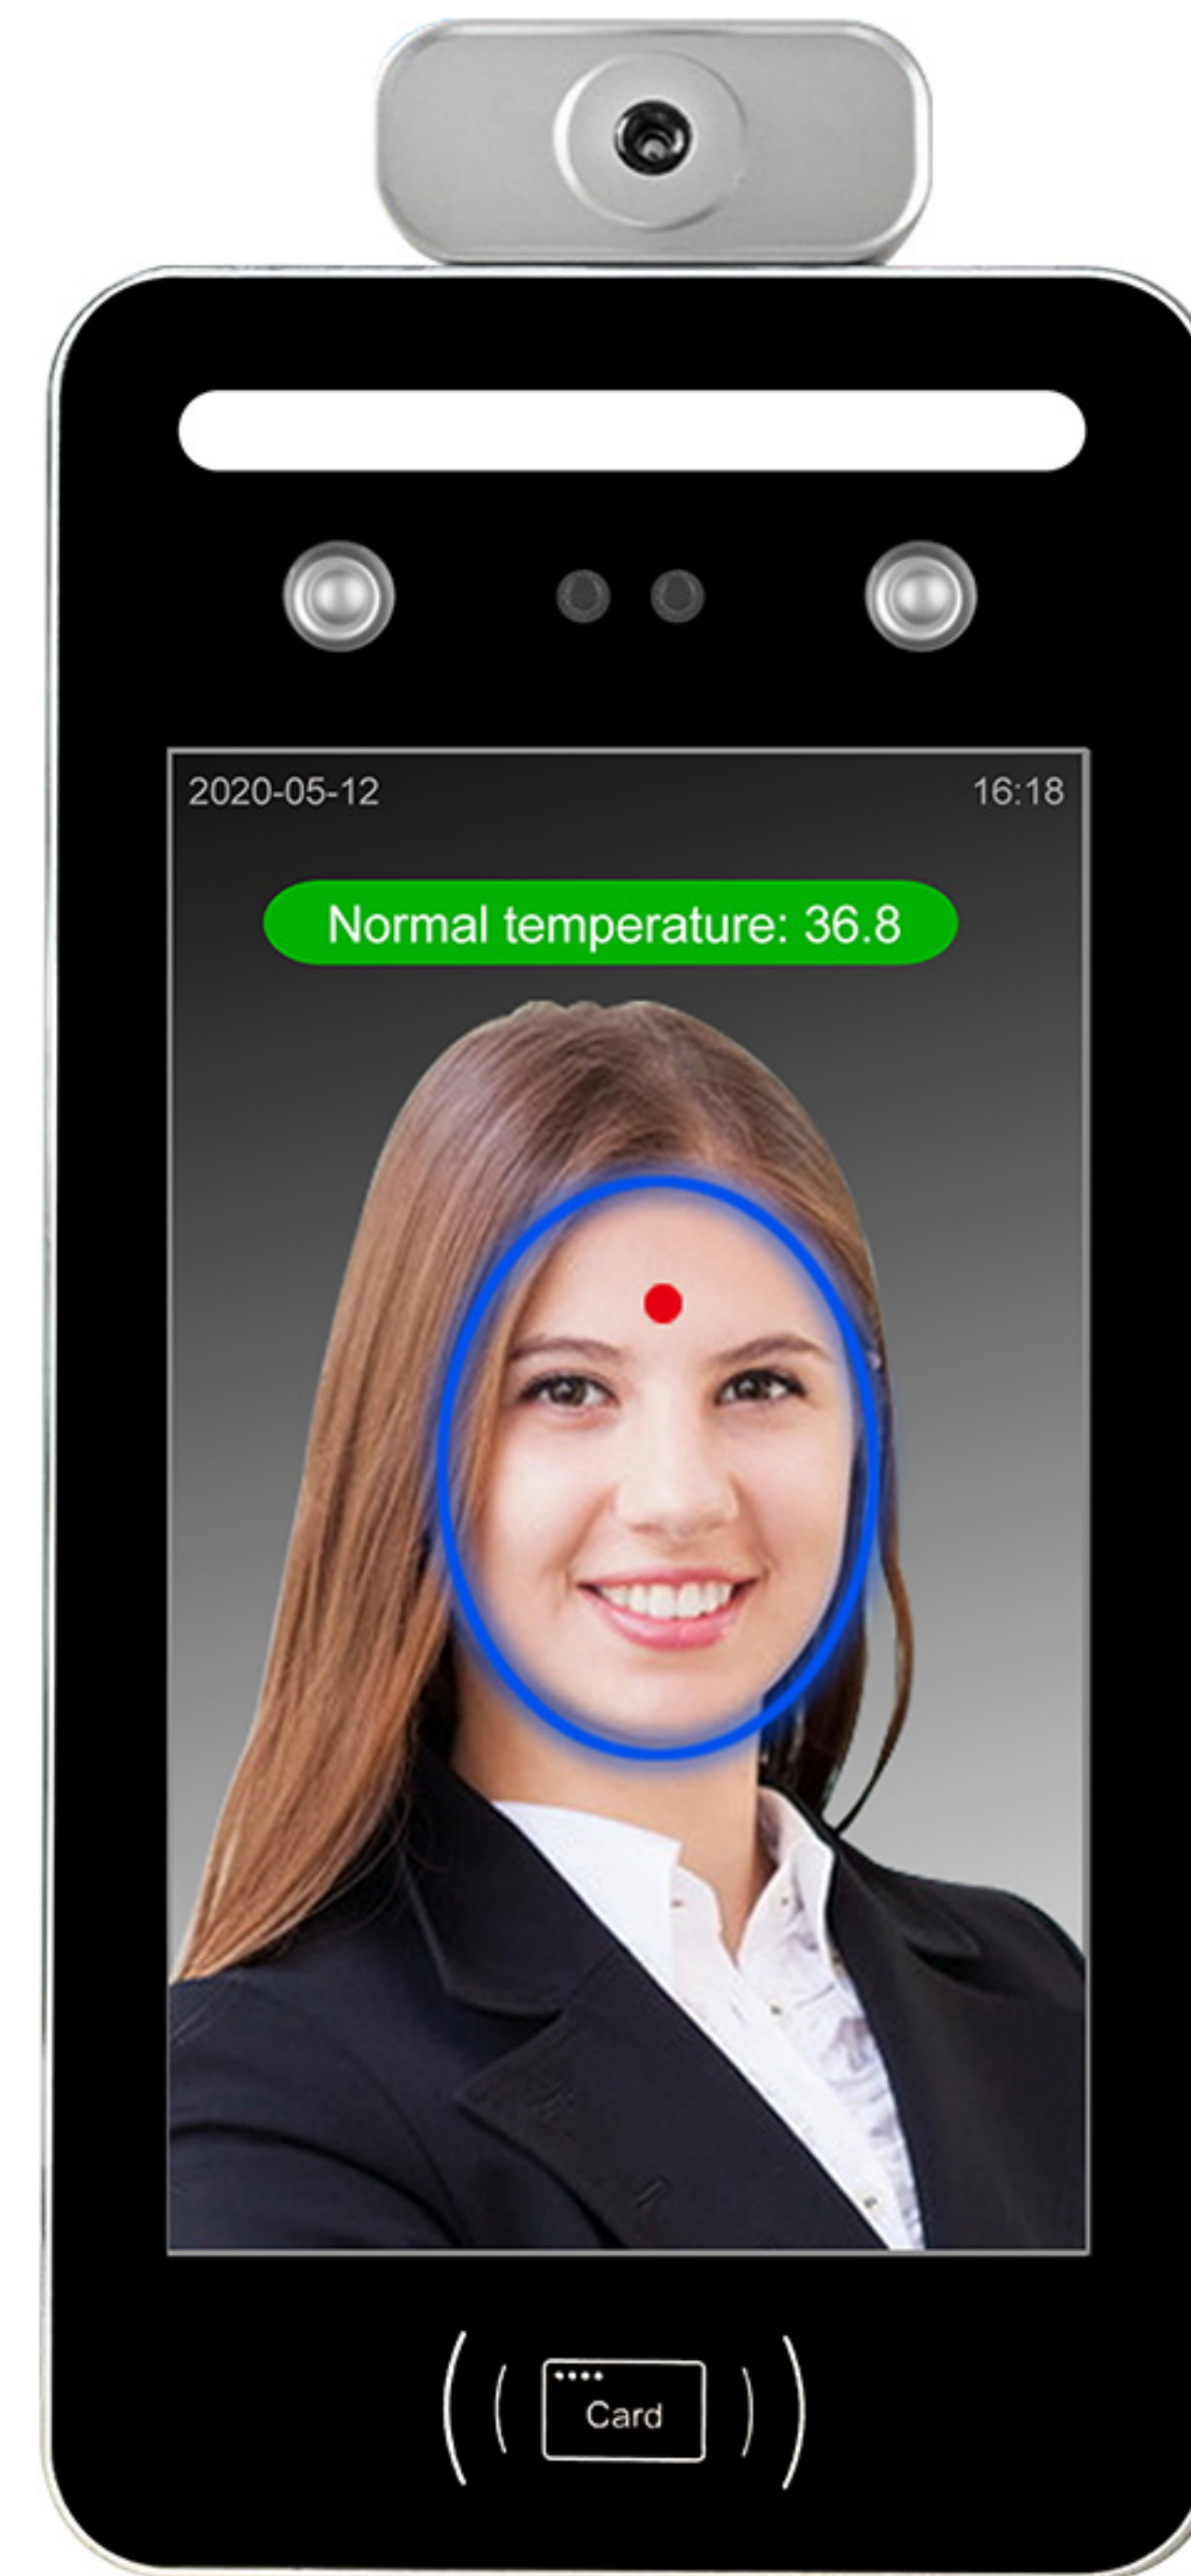

265mm

132.6mm

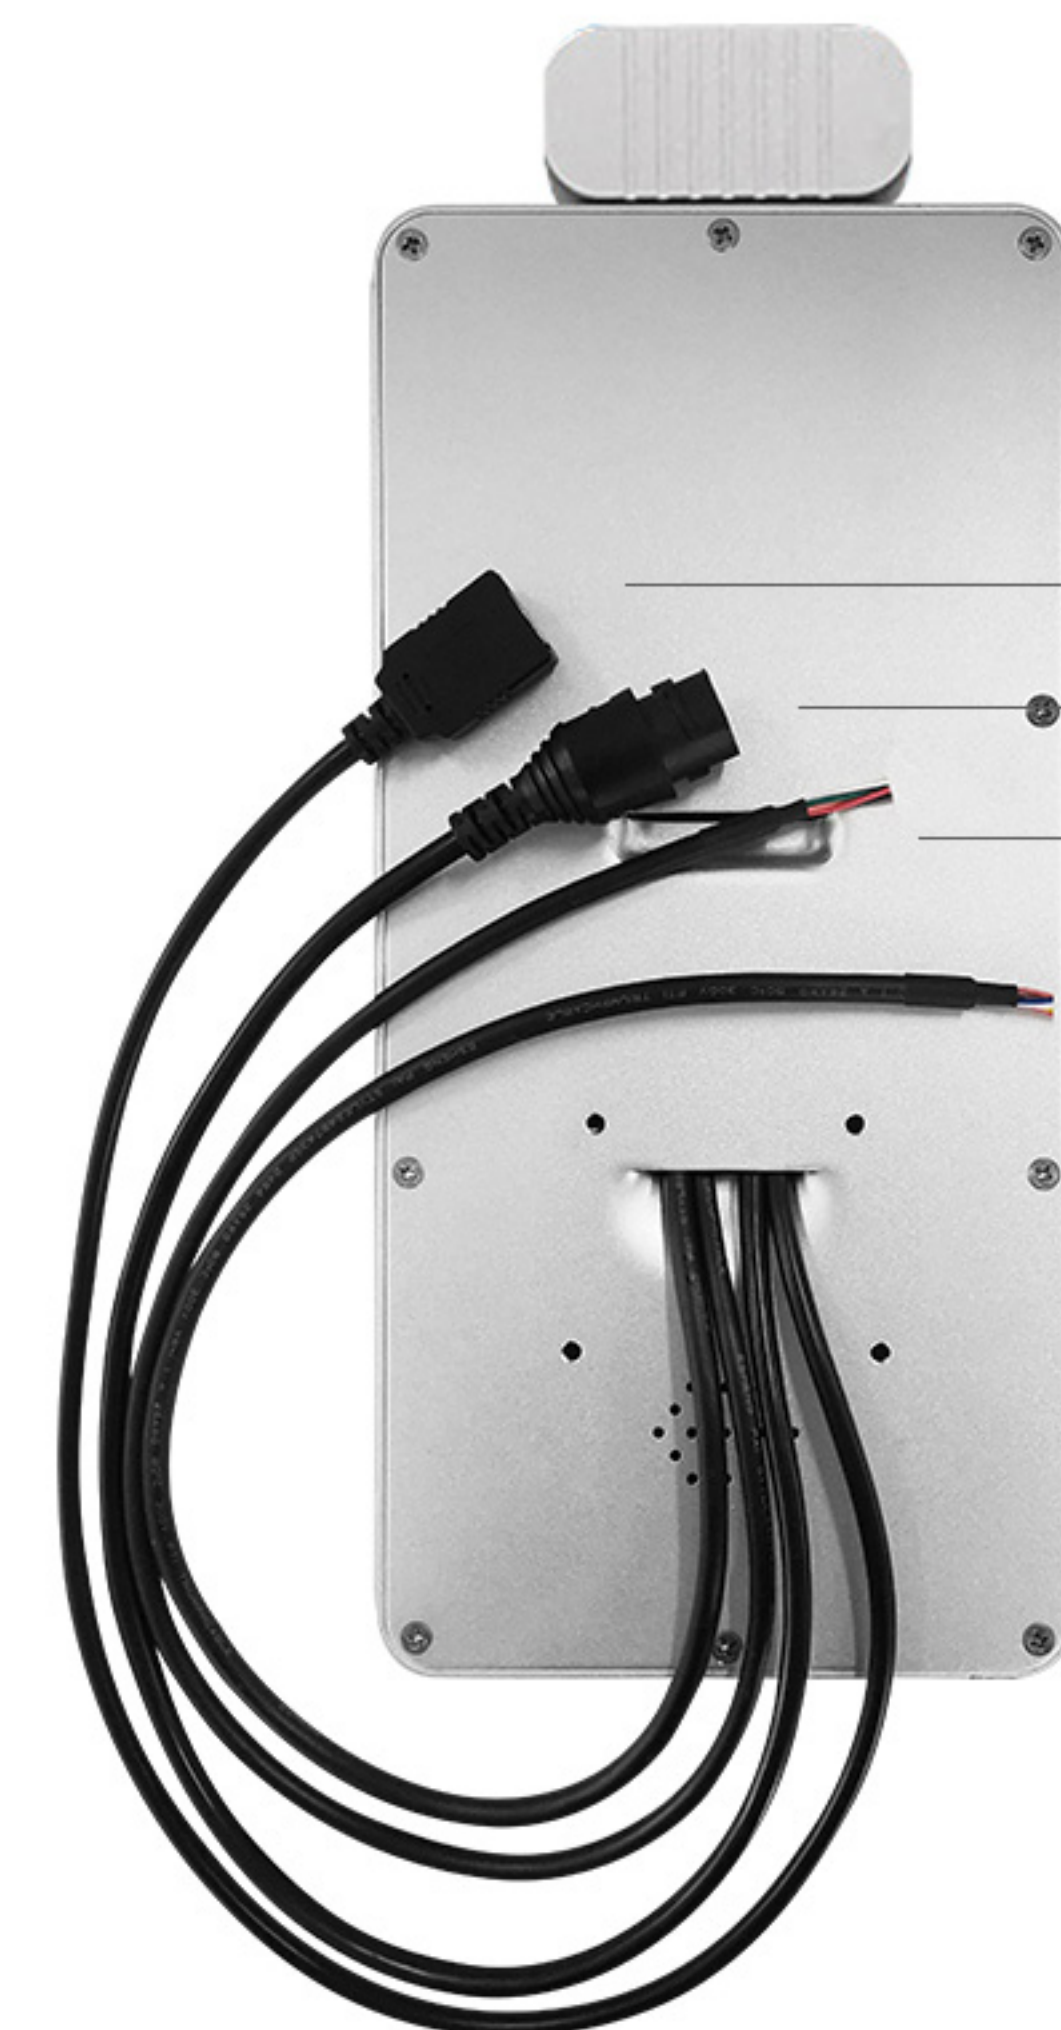

USB

TCP/IP

6PIN (Power / WG In, out)


8PIN (Alarm / Push button)

Temperature Record and Attendance Report Checking

Serial number	Registration number	Name	Id	Temperature	Time
1	268435455			43.4	2020-03-23 14:53:24
2	268435455	JAKEY		43.4	2020-03-23 14:53:24
3				37.2	2020-03-23 14:53:47
4	268435455	JAKEY		37.2	2020-03-23 14:53:48
5	3	JAKEY		38.6	2020-03-23 14:54:04
6	268435455			38.6	2020-03-23 14:54:05
7	3			38.6	2020-03-23 14:54:06
8	268435455	JAKEY		38.6	2020-03-23 14:54:07
9	3	JAKEY		38.6	2020-03-23 14:54:08
10	268435455			38.6	2020-03-23 14:54:09
11	3	JAKEY		38.6	2020-03-23 14:54:10
12	268435455			38.6	
13	3				
14	268435455	JAKEY			

Through USB Flash
Driver Download

Through
Cloud
Software

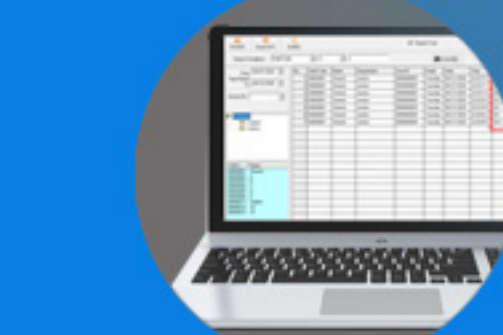

Through Desktop
Software

Long Stand

Medium Stand

Short Stand



600

1099



Infrared Precise
Temperature
Detection



Multiple Mode for face
registration



Fast Live body
Detection



Time Attendance and
Access Control

Specifications :

CPU	4 cores 1.2G
Temperature detection distance	0.5 meter
Temperature detection error	0.5°C
Temperature detection minimum unit	0.1°C
RAM	512M DDR3
ROM	4G eMMC
Camera	200W Pixel hd color camera, 100W Infrared camera
LED	LED Double high power infrared light
Display	8.0" Capacitive LCD touch screen
Resolution	800*1280
Communication	TCP/IP, USB type-A, WIFI
FRR	≤0.1%
FAR	≤0.001%
Power supply	DC 12V, 2A
Operating temperature	-15°C - 60°C
Operating system	LINUX
Language	Chinese, English, Spanish, French, Turkish, Thai, Indonesian and more
User capacity	10000
Record Capacity	1,000,000
Identification style	Visible Light Facial Recognition, PIN, ID, face & PIN combination
Identification Mode	1:1, 1:N
Recognition	Name recognition, work number recognition
Face recognition time	<0.2S
Intelligent function	Live face detection
Detection rang	0.5-3m
Magnetic door	support
Alarm output	1 set
WG	1 set WG In, out
Dimension	265mm*132.6mm*20mm



Round stick type



Wall mounted type

Installation methods




standard



desktop



children's models

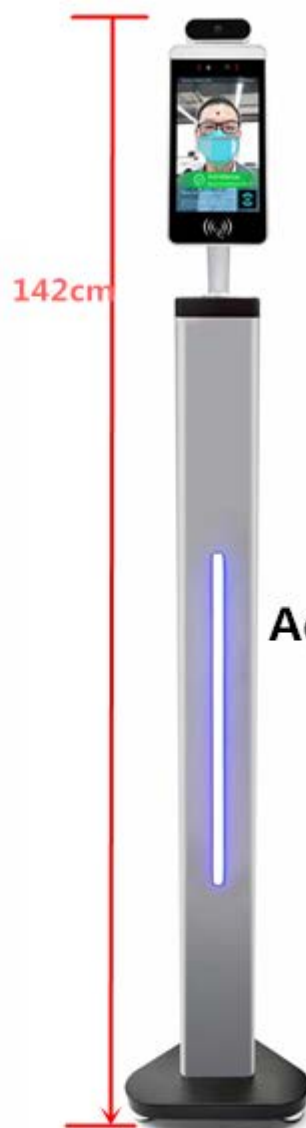

floor stand



Adjustable angle

